

ADDITIONAL TANK/S INSTALLATION INSTRUCTIONS - TANK BANK

IMPORTANT:

- Tanks are not to be played with or climbed upon at any time.
- Before installing you must read instructions below.
- Clear debris from around the installation area.
- EGR Water Tanks must be installed on a suitably designed reinforced concrete slab or other suitable compacted and retained crushed dust base, EGR recommends a level concrete slab at least 75mm thick and 150mm larger than the base of the tank around the perimeter.
- EGR recommend that you use a qualified tradesman to install your tank.
- All Slimline Water Tanks must be installed adjacent to an existing wall of a building or property, and in the case of the 1250L Tank, supported at the top of the tank by fitting the kit supplied.

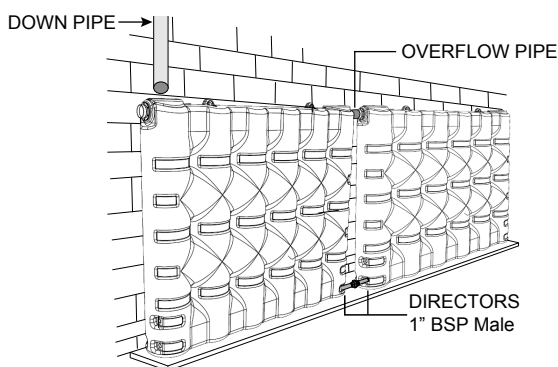
WARNING: TANKS ARE NOT DESIGNED TO BE CLIMBED UPON AT ANY TIME. TANKS ARE NOT TOYS. THESE INSTRUCTIONS SPECIFICALLY REFER TO INSTALLATION AGAINST EITHER CONCRETE, REINFORCED BLOCK OR BRICK WORK SUBSTRATE IF REQUIRED (1250L SLIMLINE TANK INSTALLATIONS).

To ensure this product is installed to comply with the Australian Standards AS1170.0-2002 General principles, AS1170.2-2002 Wind actions, AS4100-1998 Steel structures, this tank must be installed on a suitably designed reinforced concrete foundation slab overlaying stable foundation material or other suitable compacted and retained crushed dust base and supported along the top edge of the tank as shown in the fitting instructions below. This structure has been tested where the ultimate tension force on the wall anchor will be 2.5kN and shear force 0.5kN. EGR states the use of ChemSet Maxima Spin Capsules M8x80 anchors are required for either concrete, reinforced block or brickwork substrate. Should the substrate on the supporting wall differ from those noted above, the tank installer should seek advice from an appropriate qualified structural engineer to design an anchor which has sufficient capacity for the ultimate 2.5kN tension force and 0.5kN shear force.

DISCLAIMER:






EGR recommends that each tank is installed by a qualified tradesperson. Each tank must be installed in accordance with product specification guidelines and in accordance with local, state and federal regulations. EGR accepts no liability in the case of faulty or incorrect installation, or installation which would be considered hazardous or dangerous. EGR accepts no liability concerning incorrect use of this water tank or use outside of normal household use.

ADDITIONAL TANK INSTALLATION - TANK BANK



For additional tanks: **Drill out plastic cap within the inside of the brass connectors using a 25mm Spade Bit or 20mm Drill Bit.** Additional tanks **must** be on the same levelled concrete ground. Tanks can be connected using the 1" BSP director fittings & flexible reinforced pipe through the brass connectors located at the bottom of all Slimline Water Tanks. Tighten the hose clamps to seal the hose onto the director fitting when finished. **We recommend a qualified tradesperson install overflow pipes between multiple joined water tanks (2 or more).**

RECOMMENED HARDWARE FOR JOINING TWO OR MORE SLIMLINE TANKS TOGETHER.

- 25mm Tail x 25mm BSPM (plastic) Directors (1 per tank out) **[3128198]** 
- 90mm Storm PVC Caps-Push on (1 per additional tank for overflow) **[4773900]** 
- Hose Clamps (1 per director) **[4920012]** 
- Flexible reinforced hose to be connected onto directors between tanks **[5000369]** 
- PVC glue for securing Storm cap on overflows of additional tanks 

NOTE: AVAILABLE AT BUNNINGS [CODE] OR IRRIGATION SUPPLIERS